




1

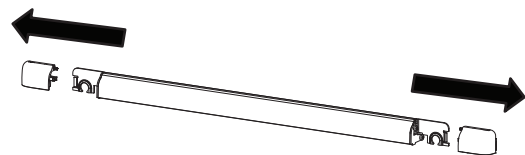


2

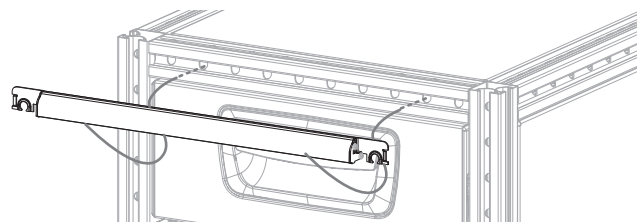


3

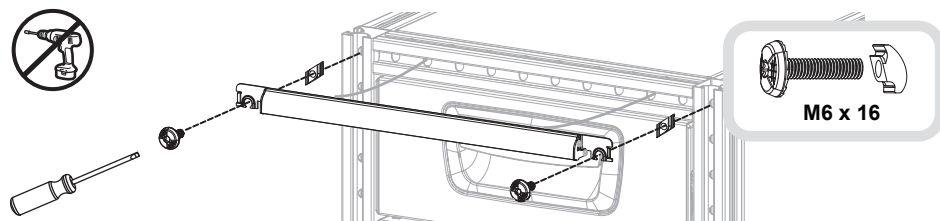





4

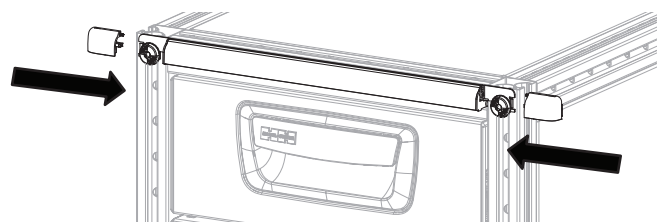






5

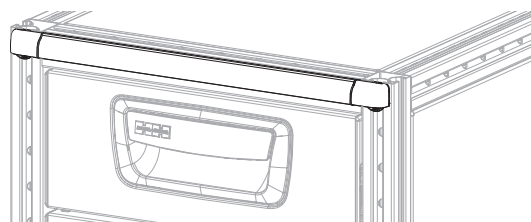

1

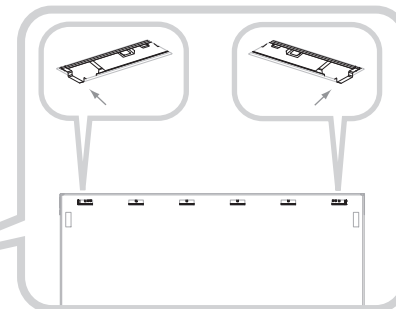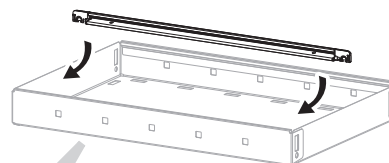


2

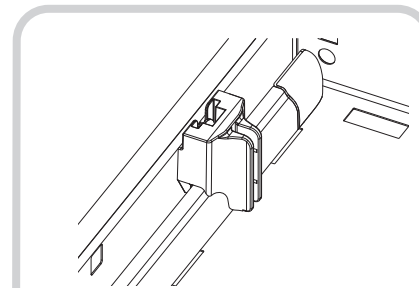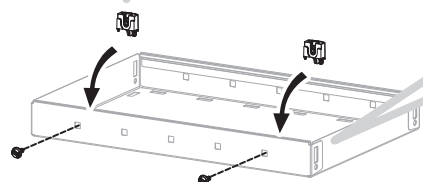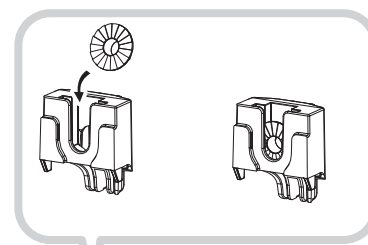

M6 x 16

3

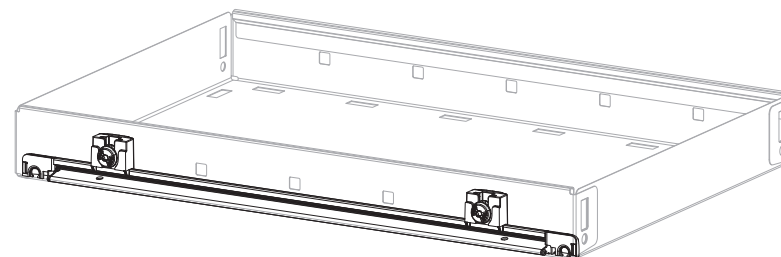



Modul-System Drawer Unit/Shelf Light

Technical specification

Part number Description	19710-03 Drawer unit/ shelf light 324	19711-03 Drawer unit/ shelf light 486	19712-03 Drawer unit/ shelf light 648	19713-03 Drawer unit/ shelf light 972
Total length (mm)	320	482	644	968
Total width (mm)	17	17	17	17
Total height (mm)	17	17	17	17
Weight (g)	0.08	0.12	0.16	0.24
Power supply (V)	12	12	12	12
Power (W)	2	3	4	6
Lumens (lm)	90	190	220	410
Color temperature (K)	6700	6700	6700	6700
Light spread angle	120°	120°	120°	120°
Installation	2xM6			
Material specification - housing	Aluminium, steel, polypropylene, polyurethane.			
IP	IP65.			
IC	IC is a "constant current source". This means that the LED brightness will stay constant, even when the power supply fluctuates (interval of 11-16V).			
EMC	Tested for electromagnetic compatibility (EMC) according to UN ECE Regulation No. 10.04. 04.			
ESD	Tested for immunity to electrostatic discharge (ESD). ESD tests according to EN 61000-4-2.			
CE	CE marked. Tests were based on EN 50498:2010, product family standard for aftermarket electronic equipment in vehicles and additional RF immunity tests according to UN ECE Regulation No. 10.04. 04.			